

## 425205WT

	<b>EAN</b>	<b>5060235344381</b>
	<b>Finish</b>	<b>Straight White</b>
	<b>Width</b>	500mm
	<b>Height</b>	1200mm
	<b>Fitted Depth</b>	79mm
	<b>Horizontal Profile Size</b>	22mm
	<b>Vertical Profile Size</b>	40mm x 30mm D Shaped
	<b>Thread to Thread Centre</b>	455mm
	<b>Wall to Thread Centre</b>	64mm
	<b>Thread Orientation</b>	Vertical Into Bottom
	<b>Weight</b>	8.1 kg

### Installation & Usage Options


Central Heating System

	<b>Thermal Output dt50</b>	499 Watts – 1703 BTU
	<b>Thermal Output dt30</b>	263 Watts – 897 BTU
	<b>Maximum Working Pressure</b>	1000 kPa – 10 Bar

Option – Electric Only or Dual Fuel

	<b>400 Watts Electrical Element Kit – EAN 5060235341519</b>
--	---

### Fitted Dimensions

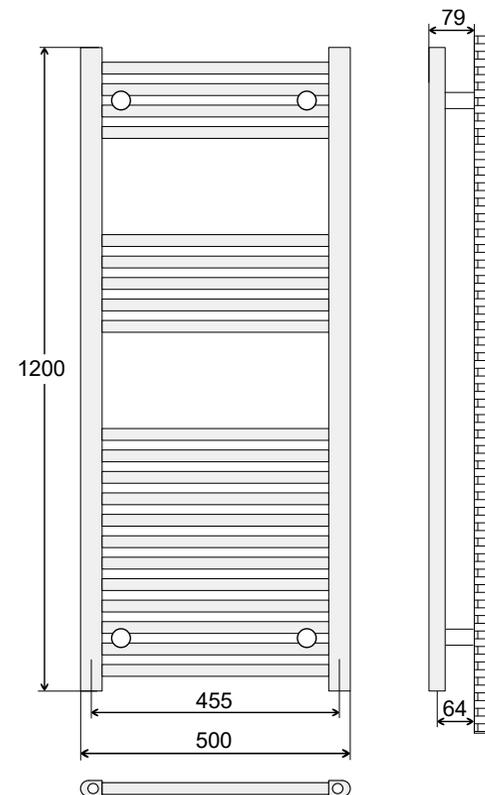

#### Product Information

Conform to EN 442 standard

CE Mark applied

Brackets and Fixings included

#### Specification

Pressure tightness: No leakage at 1.3 x MOP

Resistance to pressure: No breakage at 1.69 x MOP

Maximum operating pressure (MOP): 1000 kPa

Maximum surface temperature: 110°C

Resistance against corrosion: No corrosion after 100 h humidity