## **Towel Warmer - Technical Specification**

Primaflow F&P


79

64

## 425336CP

|                                     | EAN  | 5060717430939        |  |
|-------------------------------------|--|----------------------|--|
| 1                                   | Finish   | Straight Chrome      |  |
| Livin                               | Width  | 300mm                |  |
|                                     | Height   | 750mm                |  |
|                                     | Fitted Depth   | 79mm                 |  |
|                                     | Horizontal Profile Size                              | 22mm                 |  |
|                                     | Vertical Profile Size                                | 40mm x 30mm D Shaped |  |
|                                     | Thread to Thread Centre                              | 255mm                |  |
|                                     | Wall to Thread Centre                                | 64mm                 |  |
|                                     | Thread Orientation                                   | Vertical Into Bottom |  |
|                                     | Thread Size  | 1/2" BSP             |  |
| Ø                                   | Weight   | 3.2 kg               |  |
| Installation & Usage Options        |  |                      |  |
| Central Heating System              |  |                      |  |
| ł                                   | Thermal Output dt50                                  | 148 Watts – 465 BTU  |  |
|                                     | Thermal Output dt30                                  | 78 Watts – 245 BTU   |  |
|                                     | Maximum Working Pressure                             | 1000 kPa – 10 Bar    |  |
| Option – Electric Only or Dual Fuel |  |                      |  |
| <u>,</u>                            | 150 Watts Electrical Element Kit – EAN 5060235341496 |                      |  |

## **Fitted Dimensions**

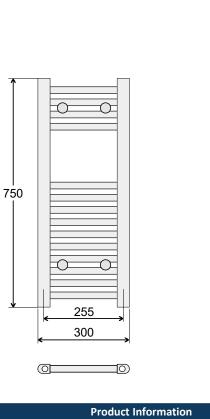

| Product Information   |   |
|---|---|
| Conform to EN 442 standard                                      |   |
| CE Mark applied   |   |
| Brackets and Fixings included                                   |   |
| Specification   |   |
| Pressure tightness: No leakage at 1.3 x MOP                     |   |
| Resistance to pressure: No breakage at 1.69 x MOP               |   |
| Maximum operating pressure (MOP): 1000 kPa                      |   |
| Maximum surface temperature: 110°C                              |   |
| Resistance against corrosion: No corrosion after 100 h humidity | - |
|   |   |