### AQUALISA® E1 AQUALISA ELECTRIC


WHITE - 9.5KW ELECTRIC SHOWER

#### DIMENSIONAL DRAWINGS

## 210mm 96mm 95mm aφualisa 301mm 0

#### CONNECTIONS

Water

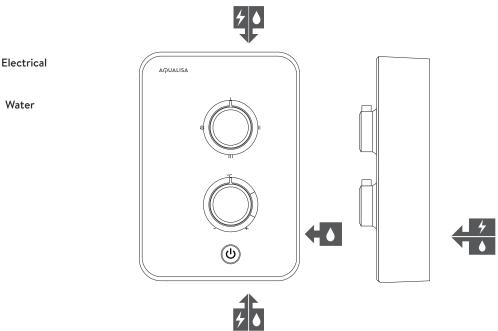

The company reserves the right to alter, change or modify the product or product specifications without prior warning. Please refer to the installation guides for technical information.

#### E1W95

# AQUALISA ELECTRIC

\_\_\_\_\_

WHITE - 9.5KW ELECTRIC SHOWER

#### TECHNICAL SPECIFICATIONS

Power	9.5kW
Minimum pressure requirements	1 bar
Maximum pressure requirements	10 bar
Water entry points	Right – top, bottom, side and rear
Cable entry points	Right – top, bottom and rear
Inlet fitting connections	15mm push fit, 15mm compression
Outlet fitting connections	1/2" BSP thread
Supply temperature	Mains Cold Supply Only 5 – 25°C
Electric requirements	Supply voltage 230 – 240V
Water system	Mains cold system
Features	3 Power settings
	Push button start/stop
	Temperature control
	Adjustable stainless steel rail
	Thermal cutout
	Single mode handset
Colour	White
Guarantee period	Shower Unit 2 year guarantee
	Shower Head and Kit 2 year guarantee
Approvals	CE Marking
	BEAB
	European Water Label
	ERP Directive