

# Elina Bar Mixer

Type 3 TMV Thermostatic Inclusive Mixer Shower

## Product Codes

Elina Type 3 TMV Inclusive Bar Mixer Shower (Valve Only)	ELITHBMINC3BOT
Elina Type 3 TMV Inclusive Bar Mixer Shower (Valve and Grab Kit)	ELITHBMINC3

## Installation

- 15mm push-fit
- 1/2" BSP

## End User

- Separate flow and temperature controls for ease of use
- Automatic shutdown safety feature if hot/cold water supplies fail
- Thermostatic temperature control and Type 3 (TMV) approval for added peace of mind
- KIWA UK Reg 4 approved for water supply regulations compliance (\*Valve only)
- Suitable for all pressure systems
- Simple to install and maintain - Includes push fit fixings for concealed pipework
- Inclusive Grab Riser Kit includes dual purpose grab riser rail able to withstand up to 150kg
- Rub clean, five spray pattern shower head
- 2m anti-twist hose






# Elina Bar Mixer

Type 3 TMV Thermostatic Inclusive Mixer Shower

## Shower

Temperature Control	Thermostatic
Plumbing System Compatibility	All systems
Inlet Fittings	Push-fit
Inlet Connection	1/2" BSP to 3/4" flat face union
Outlet Connection	1/2" BSP bottom
Minimum Running Pressure/Flow	0.1 Bar @ 8 l/min
Maximum Running Pressure	5 Bar
Maximum Static Pressure	10 Bar
Approvals, Complies with	KIWA Type 3 (thermostatic mixing valve), KIWA UK Water Regulation 4
Guarantee	5 years

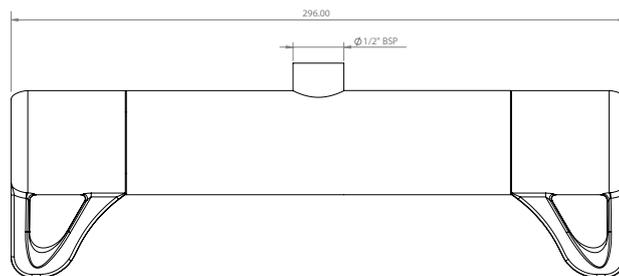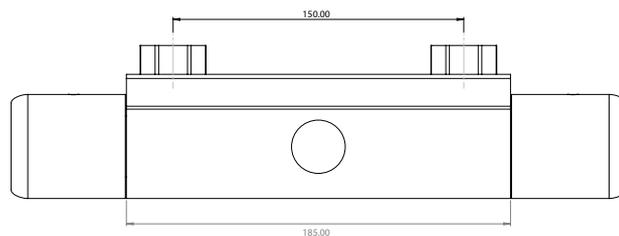

## Riser Rail Kit

<b>Standard version</b>	
Length	Approx 940mm
Diameter	25mm
Material	Stainless steel
Hose	2m anti-twist



8000 | Care Five Spray Shower Head - Chrome  
TSHECARECHR



2m Anti-twist Hose - Chrome  
TSHG1266



Inclusive Shower Grab Riser Rail - Chrome  
TSKINCGRBCH

Contact our specification team

Call: 02476 324 776 | Email: [specification@tritonshowers.co.uk](mailto:specification@tritonshowers.co.uk) | Web: [www.tritonshowers/specifiers](http://www.tritonshowers/specifiers)

(1) Tri-Therm™ constantly regulating flow, blending water and adjusting the power to precisely control the showering temperature.  
 (2) Safe-Set™ tamper proof maximum temperature setting whilst allowing full rotation of the temperature dial.  
 (3) The shower will operate down to 0.5 bar at reduced flow rates.