## **Towel Warmer - Technical Specification**

Primaflow F&P


83

62

## 425346CP

	EAN	5060717430953	
1	Finish	Curved Chrome	
Linit	Width	400mm	
	Height	750mm	
	Fitted Depth	83mm	
	Horizontal Profile Size	22mm	
	Vertical Profile Size	40mm x 30mm D Shaped	
	Thread to Thread Centre	355mm	
	Wall to Thread Centre	62mm	
	Thread Orientation	Vertical Into Bottom	
	Thread Size	1/2" BSP	
Ø	Weight	3.8 kg	
Installation & Usage Options			
Central Heating System			
ł	Thermal Output dt50	200 Watts – 682 BTU	
	Thermal Output dt30	108 Watts – 368 BTU	
	Maximum Working Pressure	1000 kPa – 10 Bar	
Option – Electric Only or Dual Fuel			
<u>^</u>	150 Watts Electrical Element Kit – EAN 5060235341496		

## **Fitted Dimensions**

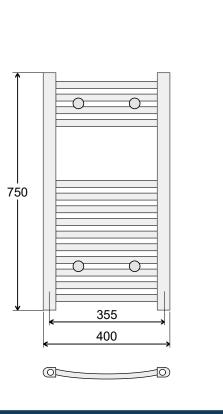

Product Information	
Conform to EN 442 standard	
CE Mark applied	-
Brackets and Fixings included	
Specification	
Pressure tightness: No leakage at 1.3 x MOP	
Resistance to pressure: No breakage at 1.69 x MOP	-
Maximum operating pressure (MOP): 1000 kPa	
Maximum surface temperature: 110°C	
Resistance against corrosion: No corrosion after 100 h humidity	

Primaflow F&P Votec House, Hambridge Lane,Newbury, RG14 5TN