Mira React Monobloc

Basin Monobloc Tap



Easy to fit, with a universal design.

Mira React Monobloc tap can work across any bathroom providing enhanced performance and understated style.

Product Information

Description	Colour	Product No.
Mira React Monobloc	Chrome	2.1977.002

Features & Benefits

Flexi tails are included for easy installation Waste Included - Everything required for installation is supplied, including the waste. The robust brass construction ensures durability The simple, easy to use lever handle with hot and cold indicators ensure that it is easy to use Style-matched to the Mira React showering range Sustainable flow aerators enhance the feel of the water, ensuring a richer performance





Product Specification

Tech Details

Temperature and flow control

Temperature control type: Non-Thermostatic

Flow control type: Ceramic

Installation

Flexi tails are included for easy installation

Performance

Flow rate: 2.4 L/min at 0.5 bar

Supply Conditions (hot and cold)

Cold water range: 1°C to 25°C

Hot water range: Min 55°C; 60°C - 65°C (recommended)

Minimum Dynamic Pressure: 0.2 bar (2 metre head)

Recommended Dynamic Pressure: 1.0 bar (10 metre head) +

Maximum Dynamic Pressure: 5.0 bar (50 metre head)

Maximum static pressure: 10.0 bar (100 metre head)

Annrovals


KIWA UK approved product

WRAS approved (Water Regulations Advisory Scheme)





Dimensions

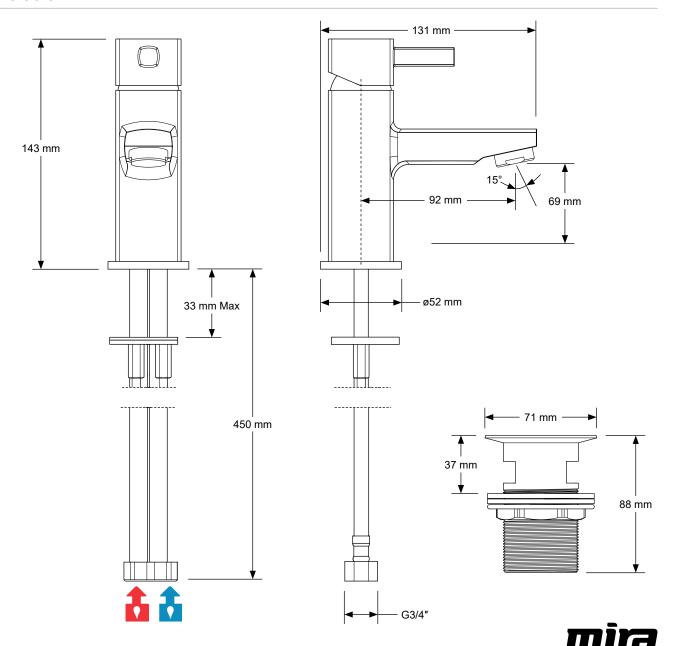

SHOWERS